

UTILITY PATENT APPLICATION TRANSMITTAL

Attorney Docket No. 1086.1124/JDH

First Named Inventor or Application Identifier:

Hideshi SAKURAI, et al.

Express Mail Label No.

(Only for new nonprovisional applications under 37 CFR 1.53(b))

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231**

1. ☒ Fee Transmittal Form
2. ☒ Specification, Claims & Abstract [Total Pages: 39]
3. ☒ Drawing(s) (35 USC 113) [Total Sheets: 17]
4. ☒ Oath or Declaration [Total Pages: 3]
 - a. ☒ Newly executed (original or copy)
 - b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional with Box 17 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Applicant claims small entity status.
6. ☐ Incorporation by Reference (usable if Box 4b is checked)
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
7. ☐ Microfiche Computer Program (Appendix)
8. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary)
 - a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☒ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) [] Power of Attorney
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure Statement (IDS)/PTO-1449 [] Copies of IDS Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503) (Should be specifically itemized)
15. ☒ Certified Copy of Priority Document(s) (if foreign priority is claimed)
16. ☐ Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:[] Continuation [] Divisional [] Continuation-in-part (CIP) of prior application No: / **18. CORRESPONDENCE ADDRESS**

21171

PATENT TRADEMARK OFFICE

Staas & Halsey LLP

**NEW APPLICATION
FEE TRANSMITTAL**

Attorney Docket No.	1086.1124/JDH
Application Number	TO BE ASSIGNED
Filing Date	November 16, 2000

JC915 U.S. PT
 09/714295
 11/17/00

AMOUNT ENCLOSED	\$750.00	First Named Inventor	Hideshi SAKURAI, et al.
-----------------	----------	----------------------	-------------------------

FEE CALCULATION (fees effective 10/01/00)

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS	10 - 20 =	0	X \$ 18.00 =	\$ 0.00
	INDEPENDENT CLAIMS	2 - 3 =	0	X \$ 80.00 =	0.00
	MULTIPLE DEPENDENT CLAIMS (any number; if applicable)			+ \$270.00 =	0.00
	BASIC FILING FEE				710.00
	Total of above Calculations =				\$ 710.00
	Surcharge for late filing fee, Statement or Power of Attorney (\$130.00)				+
	Reduction by 50% for filing by small entity (37 CFR 1.9, 1.27 & 1.28).				-
	TOTAL FILING FEE =				\$ 710.00
	Surcharge for filing non-English language application (\$130.00; 37 CFR 1.52(d))				+
	Recordation of Assignment (\$40.00; 37 CFR 1.21(h)(1))				40.00
	TOTAL FEES DUE =				\$ 750.00

METHOD OF PAYMENT

- ☒ Check enclosed as payment.
☐ Charge "TOTAL FEES DUE" to the Deposit Account No., below.
☐ No payment is enclosed and no charges to the Deposit Account are authorized at this time.


GENERAL AUTHORIZATION

- ☒ If the above-noted "AMOUNT ENCLOSED" is not correct, the Commissioner is hereby authorized to credit any overpayment or charge any additional fees necessary to:

Deposit Account No.	19-3935
Deposit Account Name	STAAS & HALSEY LLP

- ☒ The Commissioner is also authorized to credit any overpayments or charge any additional fees required under 37 CFR 1.16 (filing fees) or 37 CFR 1.17 (processing fees) during the prosecution of this application, including any related application(s) claiming benefit hereof pursuant to 35 USC § 120 (e.g., continuations/divisionals/CIPs under 37 CFR 1.53(b) and/or continuations/divisionals/CPAs under 37 CFR 1.53(d)) to maintain pendency hereof or of any such related application.

SUBMITTED BY: STAAS & HALSEY LLP

Typed Name	James D. Halsey, Jr.	Reg. No.	22,729
Signature		Date	November 16, 2000

TITLE OF THE INVENTION

PACKET RELAY APPARATUS AND METHOD

BACKGROUND OF THE INVENTION5 1. Field of the Invention

The present invention relates generally to an apparatus and a method for relaying packets on an IP network, and more particularly to a packet relay apparatus and method providing a control of communication paths within the network depending on the types of applications.

2. Description of the Related Arts

In the conventional internet protocol network (hereinafter referred to as "IP network") such as Internet or intranets, there intermingle various communications including client applications, business applications, file transfer, mails and voices, so that grading of communication qualities on a communication by communication basis, called QOS (quality of service) poses a problem. The grading of the communication quality is performed for example such that a highest communication priority is imparted to the client applications so that a certain voice band is constantly assured, with the communications for the file transfer and mails being suppressed to such a degree as not to impede the other communications. It is problematic in this case how to realize the demands for the thus graded

communication qualities. The quality of service QOS is especially essential in a relatively low-speed network such as a wide area network (hereinafter referred to as WAN) whose bands are apt to become full, rather than in
5 a high-speed network such as a local area network (hereinafter referred to as LAN). Two approaches lie to the quality of service QOS, one being how to realize the quality of service demanded, the other being how to separately use a plurality of different communication
10 paths provided. For the separate use of the plurality of communication paths, a packet relay apparatus, typically called, e.g., a layer 4 switch (L4 switch) is provided that uses different packet destinations depending on the applications. When judging the
15 application as a result of analysis of the contents of a packet, this packet relay apparatus sends the packet to the next packet relay apparatus corresponding to the application.

FIG. 1 is an explanatory diagram of a
20 communication form using the packet relay apparatus using different packet destinations depending on the applications. A LAN 101-1 includes a node 100-1 and is followed by a packet relay apparatus 102-1 that uses different packet destinations depending on the
25 applications. In this case, the packet relay apparatus 102-1 is connected via routers 104-1 and 104-2 to an IP network 108 such as WAN or Internet. A LAN 101-2 includes

a node 100-2 and is followed by a packet relay apparatus 102-2 that uses different packet destinations depending on the applications. In this case, the packet relay apparatus is connected via routers 106-1 and 106-2 to the IP network 108. In case of the business application, the packet relay apparatuses 102-1 and 102-2 designate the routers 104-1 and 106-1 so that the packet is passed through a communication path 110-1. For the other applications, the packet relay apparatuses 102-1 and 102-2 designate the routers 104-2 and 106-2 so that the packet is passed through a communication path 110-2.

However, in the event of provision of the packet relay apparatuses on a LAN by LAN basis as in FIG. 1, when communications are made between n LANs 100-1 to 100-n by way of the IP network 108 as shown in FIG. 2, a corresponding number of packet relay apparatuses 102-1 to 102-n to the number of LANs are required, resulting in a steep rise of the system costs. Thus, the inventors of this application have conceived that as shown in FIG. 3 the packet relay apparatus 102-1 is disposed only on the LAN to which belongs a specific node 100-1 executing the application, with 1 : (n - 1) communications between the node 100-1 and the other nodes 100-2 to 100-n using different packet destinations depending on the applications.

FIG. 4 illustrates in an exclusive manner the communication form of the nodes 100-1 and 100-2 of FIG.

3. This is a communication form without the packet relay apparatus 102-2 on one hand of FIG. 16. The node 100-1 sets the packet relay apparatus 102-1 as the default gateway, whereas the node 100-2 sets the router 106-2 as the default gateway. The packet relay apparatus 102-1 is designed so as to send only a business application packet to the router 104-2. If the node 100-1 issues a business application packet at that time, then the packet relay apparatus 102-1 sends the packet to the router 104-2 in compliance with the design, the packet arriving at the node 100-2 by way of the communication path 110-2. However, when the node 100-2 returns the business application packet, it delivers the packet to the router 106-1 that is a default gateway, the packet arriving at the node 100-1 by way of the communication path 110-1. In other words, the send packet belonging to the node 100-1 business application is delivered via the communication path 110-2 to the node 100-2, whereas the reply packet belong to the business application from the node 100-2 is returned via the other communication path 110-1 to the node 100-1. For this reason, separate use is impossible that the business application is exclusively passed through the communication path 110-2, with the other application being passed through the communication path 110-2.

SUMMARY OF THE INVENTION

According to the present invention there are

provided packet relay apparatus and method capable of controlling so as to allow packets to pass through application dependant communication paths in a reciprocative manner, the packet relay apparatus being
5 disposed on only one side of nodes for packet communications.

The present invention provides a packet relay apparatus for relaying packets between an inside node and an outside IP network. The packet relay apparatus
10 comprises a class processing unit, a send packet relay unit and a reply packet relay unit. The class processing unit is arranged to classify send packets to be relayed to the IP network, depending on the types of applications and make allocation of different virtual IP addresses
15 (10. 1. 2), (10. 1. 3) on a class by class basis. The send packet relay unit is arranged to translate a source address (10. 10. 10. 10) of the send packet to be relayed to the IP network into a virtual IP address (10. 1. 2. 10) or (10. 1. 3. 10) on a class by class basis, and
20 establish IP communication paths on a class by class basis in the IP network. The reply packet relay unit is arranged to inversely translate a destination address (10. 1. 2. 10) or (10. 1. 3. 10) of a reply packet from the IP network passing through the IP communication paths
25 on a class by class basis into an original address (10. 10. 10. 10) by reference to the results of address translation effected by the send packet relay unit.

Such a disposition of a single packet relay apparatus of the present invention on a communication path enables different communication paths for the same destination to be used depending on the applications. Thus, by
5 providing a control so as to allow the application requiring a high quality of service (QOS) to use its dedicated communication path, it is possible to absolutely keep the quality of communication. The packet relay apparatus of the present invention
10 comprises a class table having packet header information entered therein correspondingly to class names defining the types of the applications; an address translation rule table having virtual IP addresses and path information entered therein correspondingly to the
15 classes; and an address translation table having therein entered the results of address translation from the packet source addresses into the virtual IP addresses. Correspondingly to these tables, the send packet relay unit upon receipt of a send packet to the IP network
20 refers to the address translation table to retrieve a source virtual IP address. The send packet relay unit if there is no entry in the address translation table determines a class by reference to the class table and thereafter refers to the address translation rule table
25 to retrieve a virtual IP address corresponding to the class. The send packet relay unit translates a send packet source address into the retrieved virtual IP

address to enter the result of the address translation into the address translation table. The reply packet relay unit upon receipt of a reply packet from the IP network refers to the address translation table 34 to
5 retrieve a destination address corresponding to a destination virtual IP address. The reply packet relay unit inversely translates the destination virtual IP address of the packet into the retrieved destination address. The class table has protocol types, send
10 packet source addresses and port Nos. and reply packet source addresses and port Nos. entered correspondingly to the class names. The class retrieval unit retrieves a class from a combination of a protocol type of a send packet to be relayed to the IP network and a port No.
15 For example, the class table has class names of a business application entered in the form of combinations of send packet TCP protocols and port Nos., the class table having all of the combinations of the other protocol types of the send packets and source port Nos. entered
20 by class names of a default application. The address translation rule table has virtual IP addresses and gateway MAC addresses entered correspondingly to class names entered in the class table. The send packet relay unit 42 retrieves a virtual IP address and a gateway MAC
25 address corresponding to a class name retrieved from the address translation rule table. The address translation table has pre-translation source addresses

and port Nos. and post-translation virtual IP addresses and port Nos. entered correspondingly to protocol types. In this case, the send packet relay unit translates a send packet source address into a virtual IP address
5 retrieved from the address translation rule table or the address translation table, and translates a destination MAC address into a gateway MAC address retrieved from the address translation rule table. The reply packet relay unit inversely translates a destination virtual
10 IP address received from the IP network into a pre-translation source address retrieved from the address translation table.

The packet relay apparatus of the present invention further comprises a communication path
15 validation unit arranged to make a periodical validation of communication through a communication path of the IP network by use of the virtual IP address. The communication path validation unit when detecting an abnormal of the communication path prohibits a retrieval
20 of a class that uses the communication path, to make a changeover to use of a default communication path. More specifically, the class table includes a status indicative of usable or unusable. The communication path validation unit when detecting an abnormal of the
25 communication path sets unusable in the status of the class table to prohibit a class retrieval. For this reason, even though a failure occurs on a specific

application dependent communication path, the packet communication is ensured by use of the other normal communication paths.

The present invention further provides a method of relaying packets between an inside node and an outside IP network, the method comprising the steps of classifying send packets to be relayed to the IP network, depending on the types of applications, to allocate a different virtual IP address to each class; translating source addresses of the send packets to be relayed to the IP network into virtual IP addresses on a class by class basis to establish IP communication paths on a class by class basis in the IP network; and inversely translating destination addresses of reply packets from the IP network passing through the IP communication path on a class by class basis into original addresses by reference to the results of address translation in the send packet relaying step.

The other details of the packet relay method are substantially the same as those of the above apparatus configuration.

The above and other objects, aspects, features and advantages of the present invention will become more apparent from the following detailed description when read in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an explanatory diagram of a

conventional communication form using different paths depending on applications;

FIG. 2 is an explanatory diagram of a network having the communication form of FIG. 1;

5 FIG. 3 is an explanatory diagram of a network provided with a relay apparatus using different paths depending on specific applications;

FIG. 4 is an explanatory diagram of a communication form of FIG. 18;

10 FIG. 5 is an explanatory diagram of a communication form employing the present invention;

FIG. 6 is a function block diagram of a packet relay apparatus of the present invention provided in FIG. 5;

15 FIG. 7 is an explanatory diagram of a class table of FIG. 6;

FIG. 8 is an explanatory diagram of a TCP header format;

20 FIG. 9 is an explanatory diagram of a UDP header format;

FIG. 10 is an explanatory diagram of an address translation rule table of FIG. 6;

FIG. 11 is an explanatory diagram of an address translation table of FIG. 6;

25 FIG. 12 is an explanatory diagram of an address configuration in the communication form of FIG. 6;

FIGS. 13A to 13F are explanatory diagrams of a

node of FIG. 6 and a routing table possessed by a router;

FIG. 14 is a flowchart of an inside to outside packet relay processing in accordance with the present invention;

5 FIG. 15 is a flowchart of an outside to inside packet relay processing in accordance with the present invention;

FIG. 16 is an explanatory diagram of an ICMP echo format for use in a communication path validation unit
10 of FIG. 3;

FIG. 17 is a flowchart of communication validation processing of a path in accordance with the present invention; and

FIG. 18 is an explanatory diagram of a
15 communication form in cases where the present invention is applied to an ATM network.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

FIG. 5 is an explanatory diagram of a communication form using a packet relay apparatus of the
20 present invention. This communication form represents an exemplary case of communication between LANs 11-1 and 11-2 by way of an IP network 18 such as WAN or Internet. The LAN 11-1 comprises a node 10-1 and routers 14-1 and 14-2. The LAN 11-2 comprises a packet relay apparatus
25 12 of the present invention in addition to a node 10-2 and routers 16-1 and 16-2. The packet relay apparatus 12 includes two 10-BASSET interfaces 2, one of which is

associated with the node 10-2 side and the other of which is associated with the routers 16-1 and 16-2 side. Herein, the node 10--2 side when viewed from the packet relay apparatus 12 of the present invention is defined as the inside, whereas the routers 16-1, 16-2 side is defined as the outside. By providing the LANs 11-1 and 11-2 with the routers 14-1, 14-2 and 16-1, 16-2, respectively, in this manner, interface protocol based communications between the two LANs 11-1 and 11-2 can be effected by way of paths 20-1 and 20-1 extending through the respective routers. Upon receipt of a packet from the node 10-2, the packet relay apparatus 12 of the present invention disposed in the LAN 11-2 classifies an application to which the packet belongs and provides a control of the communication path on a class-by-class basis. This embodiment makes use of the path 20-1 for the business application communication, i.e., for relatively important communication of the port No. 472 with TCP-IP protocol, but uses the path 20-2 for the other types of application communications. By using the path 20-1 as the path dedicated to the important communications such as the business application communication in this manner, it is possible to achieve a band assurance and a response assurance. The packet relay apparatus 12 of the present invention makes a periodical check of communications through the paths 20-1 and 20-2, and if it is detected that the

communication has become impossible, then it changes over all the communications to be made through the normal path. If it is detected that the path 20-1 business application communication for example has become

5 impossible, all the communications are changed over to be made through the path 20-2 whereby the path 20-2 can serve as a backup path of the path 20-1, thus assuring communication reliabilities.

FIG. 6 is a function block diagram of the packet
10 relay apparatus 12 disposed in the LAN 11-2 of FIG. 5. The packet relay apparatus 12 is provided with ports acting as physical interfaces or logical interfaces with the outside toward the LAN 11-1 and the inside toward the LAN 11-2. More specifically, the packet relay
15 apparatus 12 is provided with an inside reception unit 22 and an inside sending unit 24 that act as the inside interface ports. It is also provided with an outside sending unit 26 and an outside reception unit 28 that act as the outside interface ports. The packet relay
20 apparatus 12 further comprises a frame processing unit 30 that serves to perform inside-outside packet relay processing and that is provided with processing features of a class processing unit 40, a send packet relay unit 42, a reply packet relay unit 44 and a communication path
25 validation unit 46. The frame processing unit 30 is associated with a table storage unit 32 that includes a class table 34, an address translation rule table 36

and an address translation table 38. When the frame processing unit 30 relays a packet from inside to outside, the relay processing is effected by the class processing unit 40 and the send packet relay unit 42. The procedure of this inside to outside packet relay processing is as follows.

- I. Refer to the class table 34 to retrieve a class to which the packet belongs;
- II. Refer to the address translation rule table 36 to perform an address translation into a network address corresponding to the class;
- III. Refer to the address translation rule table 36 to send a packet to a gateway corresponding to the network address;
- IV. Update the address translation table 38.

The inside to outside packet relay processing is described as follows in conjunction with the tables. First, in order to retrieve a class to which the packet belongs, reference is made to the class table 34 depicted in FIG. 7. The present invention employs the concept of "class" to classify the packets depending on the applications. As shown in the class table 34 of FIG. 7, the class consists of class name, protocol type, inside address and port No., outside address and port No. and status. Since the communication path 20-1 is used for the business application having the port No. 472 with the TCP/IP protocol, with the communication path

20-2 being used for the other applications, on the first line of the class table 34, "business", "TCP", and "472" are entered into the class name, protocol type and inside port No., respectively, with the other addresses and port
 5 No., having "all" entered therein. For the other than the business application, "default" is entered into the class name, with "all" being entered into the protocol type, inside and outside addresses and port Nos.

Herein, the inside and outside port Nos. of the
 10 class table 34 are field names of a TCP header format 48 of FIG. 8 and of a UDP header format 54 of FIG. 9. In the TCP header format 48 of FIG. 8 for example, the source port No. 50 results in the inside port No. and the destination port No. 52 results in the outside port
 15 No. In the case of the UDP header format 54 of FIG. 9 as well, the source port No. 56 represents the inside port No. and the destination port No. 58 represents the outside port No. The protocol type and inside and outside addresses of the class table 34 are arranged in
 20 the IP protocol header.

In the class processing unit 40 provided in the frame processing unit of FIG. 6, upon the receipt of the packet from the inside, the class table 34 is referred to by the combination of the protocol type obtained from
 25 the reception packet and the inside and outside port Nos. so that determination is made of the corresponding class name, e.g., the class name "business" or "default".

After the determination of the application class to which the packet to be relayed from inside to outside belongs through the reference to the class table 34 of FIG. 7, reference is made to an address translation rule table 36 depicted in FIG. 10 to perform the address translation of the packet source address into the network address corresponding to the class. The address translation rule table 36 of FIG. 10 includes the class name, address translation and gateway. In the class name "business", the address translation "10. 1. 2. 0" and the gateway "10. 1. 2. 1" are set whereby communication is made by use of the path 20-1 of FIG. 2. In contrast with this, the address translation "10. 1. 3. 0" and the gateway "10. 1. 3. 1" are entered for the class name "default" so that communication with the LAN 11-1 is effected by use of the path 20-2 shown in FIG. 5. It is to be noted that each address entered into the address translation rule table 36 will become clear from the description which will be made later.

After the address translation corresponding to the class name of the address translation rule table 36 of FIG. 10, the resultant packet is sent to the gateway corresponding to the thus translated network address. After the completion of the packet sending, updating is effected of an address translation table 38 as shown in FIG. 11. The address translation table 38 includes the protocol type, pre-translation address and port No. and

post-translation address and port No. The address translation table 38 is initially vacant and after the completion of the packet relay, the results of the address translation are entered therein in succession.

- 5 For this reason, after the second time or later, upon the reception of the packet from the inside, the address translation table 38 is first retrieved by use of the pre-protocol translation address and port No. Then the address and the port No. after the corresponding
- 10 translation are acquired so that address translation can be effected only by the retrieval of the address translation table 38 for the same application packet from the same node, without using the class table 34 of FIG. 7 and the address translation rule table 36 of FIG. 10.
- 15 In the absence of the entrance into the address translation table 38, the class name is determined by reference to the class table 34 of FIG. 7 and then the address translation and the gateway designation are effected by reference to the class name of the address
- 20 translation rule table 36 of FIG. 10, after which inside to outside sending is effected.

The outside to inside packet relay processing by the reply packet relay unit 44 provided in the frame processing unit 30 of FIG. 6 includes address inverse

25 translation by reference to the address translation table 38 shown in FIG. 11. That is, for the outside to inside reply packet relay, entrance has already been made

of the pre and post protocol translation addresses and port Nos. corresponding to the address translation table 38 upon the packet relay from the inside to outside. Thus, the address translation table 38 is retrieved by the
 5 protocol destination address and port No. of the packet received from the outside, i.e., by the translated address and port No, to acquire the pre-translation address and port No., which is subjected to the address inverse translation for the sending to the inside.

10 Referring to FIG. 1, description will then be made of the class based communication path control by the packet relay apparatus 12 of the present invention. In cases where there exist two paths 20-1 and 20-2 extending from the LAN 11-2 to the destination LAN 11-1,
 15 the business application packet is translated into a subnet address (10, 1. 2. 2) by the packet relay apparatus 12 of the present invention, and the other application packets are translated into a subnet address (10. 1. 3. 2). This enables the destination LAN 11-1 to see the
 20 LAN 11-2 in the network of the IP subnet address differing depending on the class. For example, physically, for the business application the packet from the same LAN 11-2 looks as if it comes from the subnet address (10. 1. 2. 2), whereas for the other application packets the
 25 packet looks as if it comes from the subnet address (10. 1. 3. 2). As a result of this, the LAN 11-2 allows the business application packet to be returned to the subnet

address (10. 1. 2. 2) and allows the other application packets to be returned to the subnet address (10. 1. 3. 2). Such a communication separately using the two paths 20-1 and 20-2 on a class basis follows the ordinary IP routing technique, so that mere arrangement of the packet relay apparatus of the present invention on the LAN 11-2 side achieves the path control separately using the paths 20-1 and 20-2 on a class basis corresponding to the type of the applications.

10 Herein, a case is exemplarily shown where the address configuration in the FIG. 1 communication form is that of FIG. 12 for example. The address configuration of FIG. 12 includes nodes 10-1, 10-2 and routers 14-1, 14-2, 16-1 and 16-2, as well as the packet relay apparatus 12 associated with the internet, address 15 and the network mask. In this case, the network mask serves to extract the network address portion of the address, with the address consisting of 8-bit four blocks, with the network mask having first three blocks of bit 20 1, namely, of 255 in decimal, and having last block of 0. Thus, by acquiring AND of the address and the network mask, a true network address can be extracted. Herein, the nodes 10-1, 10-2, the routers 14-1, 14-2, 16-1, 16-2 have address configurations in conformity with the 25 ordinary IP protocol, and the packet relay apparatus 12 of the present invention allows the inside to have a single address for the node 10-2 and allows the outside

to have two addresses "10. 1. 2. 2" and "10. 1. 3. 2" for the paths 20-1 and 20-2.

FIGs. 13A to 13F each show routing tables into which is entered the path information of the routers 14-1, 14-2, 16-1, 16-2 and the nodes 10-1, 102 in the communication form of FIG. 1. Each routing table includes a destination subnetwork, a mask and a gateway. In case of the routing table of the router 14-1 of FIG. 13A for example, entered as the routing information for the node 10-1 are destination subnetwork "10. 1. 1. 0", network mask "255. 255. 255. 0" and the gateway "direct". Entered as the routing information for the LAN 10-2 are destination subnetwork "10. 1. 2. 0", network mask "255. 255. 255. 0" and the gateway "router 16-1". The same applies to the other routing tables of FIGs. 13B to 13F, although the routing table of the node 10-2 of FIG. 13F allows packet relay apparatus 12 inside address "10. 10. 10. 1" as the gateway to be entered with the subnetwork "0. 0. 0. 0 (default)" and the mask "0. 0. 0. 0".

Following is the description of the processing actions of the packet relay apparatus 12 in accordance with the present invention when the node 10-2 makes a business application communication with the node 10-1 in the communication form of FIG. 1. First, the node 10-2 having an address "10. 10. 10. 10" sets a destination address "10. 10. 10. 1" for the packet relay apparatus 12 of the present invention acting as the gateway. Upon

receipt of a packet from the node 10-2, the packet relay apparatus 12 having the inside address "10. 10. 10. 1" refers to the address translation table 38 of FIG. 11 to retrieve the protocol type, address and the port No.

5 In this case, unless the address translation table 38 contains any communications to be retrieved, then the class table 34 of FIG. 7 is retrieved through the combination of the of the reception packet protocol type (TCP) and port No. "472", to acquire a class name

10 "business". Then the address translation rule table 36 of FIG. 10 is retrieved by the class name "business" acquired from the class table 34, to acquire an address translation "10. 1. 2. 0" and a gateway "10. 1. 2. 1". Thus, the source node 10-2 address "10. 10. 10. 10" of

15 the packet is translated into the address "10. 1. 2. 10" acquired from the address translation table 36, which result is entered into the address translation table 38 of FIG. 8. Then the address translated packet is sent to the router 16-1 that results in the gateway of the

20 address "10. 1. 2. 1" acquired from the class name "business" of the address translation table 36. Thus, in conformity with the IP protocol routing rule, the packet from the router 16-1 passes through a WAN/internet

18 a router 14-1, with the address "10. 1. 1. 10" arriving

25 at the node 10-1. The node 10-1 executes the business application based on the reception packet data and sends a reply packet toward the source node 10-2 address "10.

1. 2. 10" translated in compliance with the application class. The reply packet is relayed in conformity with the ordinary routing rule and arrives at the packet relay apparatus 12 by way of the router 16-1. The packet relay

5 apparatus 12 retrieves the address translation table 38 of FIG. 11 with the reply packet protocol type "TCP", the source address "10. 1. 2. 10" and the destination port No. "2000", to acquire the pre-translation address "10. 10. 10. 10" and the port No. "5000", to restore the

10 source address to its original state. Then the packet relay apparatus 12 relays the returned destination address reply packet to the node 10-2 of address "10. 10. 10. 10". In this manner, the packet relay apparatus 12 of the present invention performs an address

15 translation into two or more network addresses whereby an actually single address "10, 10, 10, 0" network LAN 11-2 looks virtually to have two or more subnetworks of addresses "10. 1. 2. 0" and "10. 1. 3. 0" for example for the other network LAN 11-1, thereby allowing a

20 separate use of two or more paths by use of the existing routing technique. More specifically, the node 10-1 of the LAN 11-1 allows the physically same packet from the LAN 11-2 to look like a packet from the address "10. 1. 2. 0" in case of the class "business", but look like a

25 packet from the address "10. 1. 3. 0" for the other classes. For this reason, without performing any special processing the node 10-1 of the LAN 11-1 normally

returns the packet from the address "10. 1. 2. 0" to the address "10. 1. 2. 0", i.e., to the router 14-1 that results in the gateway of the address "10. 1. 1. 1" On the other hand, the packet from the address "10. 1. 3. 0" is returned to the address "10. 1. 3. 0", i.e., to the router 14-2 that results in the gateway of the address "10. 1. 1. 2". It is thus possible to separately use the paths 20-1 and 202 for each class corresponding to the type of the application. In particular, for the node 10-1 of the LAN 11-1 that is a destination of a packet to be relayed by the packet relay apparatus 12 of the present invention, it will suffice to return the packet in conformity with the packet destination address as in the conventional manner irrespective of the presence of the packet relay apparatus of the present invention, without any need to vary the packet destination with the recognition of the difference of the application by the node 10-1 itself.

FIG. 14 is a flowchart of the packet relay processing from the inside to the outside effected by the packet relay apparatus 12 of the present invention shown in FIG. 7. First, if a packet is received from the inside in step S1, then a check is made in step S2 to see if it has already been entered in the address translation table 38. If it has not yet been entered in the address translation table 38, then the procedure goes to step S3 in which the class table 34 is retrieved

to determine the class name. Then, in step S4 the address translation rule table 36 is retrieved by the class name, to acquire the network address and the gateway. Then in step S5, the packet source address received from the inside is translated into the network address acquired from the address translation rule table 36, after which in step S6 the packet destination MAC address is translated into the MAC address of the gateway acquired in the step S4. Then in step S7, the address translation results are entered into the address translation table 38, and in step S8 the packet is sent to the outside.

FIG. 15 is a flowchart of outside to inside packet relay processing effected by the packet relay apparatus 12 of FIG. 6. If a packet is received from the outside step S1, then a check is made in step S2 to see if it has already been entered in the address translation table 38. If affirmative, then the procedure goes to step S3 in which the packet destination address is translated into the original address, and in step S4 the packet is sent to the inside. If it has not yet been entered in the address translation table 38, then the packet is discarded in step S5.

Description will then be made of processing effected by the communication path validation unit 46 provided in the frame processing unit 30 of the packet relay apparatus 12. The communication path validation unit 46 makes a periodical validation of whether

communication is possible or impossible to a specific destination under the class based path control, and if it impossible communication is judged, the path is changed over. The periodical validation processing for the specific destination effected by the communication path validation unit 46 includes periodically validating whether the communication is possible or impossible by use of an ICMP echo packet (a communication validation function packet of the internet protocol).

10 In order to validate the path communication, use is made of a self address (source address) of the same network address as that of the gateway of the path to be validated. In the validation processing of the path 20-1 of FIG. 2 for example, the packet relay apparatus 12 uses the self address "10. 1. 2. 2" as the destination address, to send an ICMP echo packet to the address "10. 1. 1. 10" node 10-1 as a specific destination. Herein, the corresponding number of self addresses to the number of paths formed between it and the specific destination are provided for the communication validation of the packet relay apparatus stands 12. In case of FIG. 1, due to the presence of the two paths 20-1 and 20-2, the self addresses "10. 1. 2. 2" and "10. 1. 3. 2" are possessed. That is, the number of the self addresses is equal to the number of the paths, and hence to the number of gateways and thus the number of the network addresses. The ICMP echo packet sent for the path communication

validation has an ICMP format 60 as in FIG. 16. The ICMP packet is a function well known in the "Ping" program. "Ping" is a program by which it is judged whether communication is possible or impossible by sending a Type = 8 ICMP packet to a specific node, by use of a protocol function that the node which has received an ICMP packet of Type = 8 (Request) in the IP header of the ICMP format 60 of FIG. 16 is required to return a Type = 0 (Reply) ICMP packet. By sending such an ICMP echo packet, if it is judged that the path communication is impossible, the communication of that path is changed over to the other normal path communication. More specifically, the status provided in the class table 34 of FIG. 4 is rewritten from "fair" which is given for normal communication to "bad". When the status corresponding to the specific class name of the class table 34 is rewritten to "bad", no use is made of the address translation using the path corresponding to the class name having the status "bad".

Following is a specific description of the path validation processing effected of the communication path validation unit 46 with reference to FIG. 1. First, the packet relay apparatus 12 periodically sends an ICMP echo packet to the node 10-1. In this case, it is necessary to check whether the path 20-1 is possible for communication, and hence the packet relay apparatus 12 uses "10. 1. 2. 2" as the source self address and sends

an ICMP echo packet to the router 16-1 with the destination address of the node 10-1 address "10. 1. 1. 10". By the ordinary routing technique, the ICMP echo packet can arrive at the destination address "10. 1. 1. 10" node 10-1. The node 10-1 sends an ICMP reply packet toward the source address "10. 1. 2. 2". The ICMP reply packet thus arrives at the packet relay apparatus 12 by way of the path 20-1. If at that time the ICMP reply packet from the node 10-1 cannot return to the packet relay apparatus 12 due to the presence of any obstacles on the path 20-1, the packet relay apparatus makes a judgment that the path 20-1 is impossible for communication and changes over the business application communication using the path 20-1 to one using the path 20-2 which has hitherto been used for the other application communications. This path changeover procedure is as follows.

If the ICMP reply does not return by the time-out, the packet relay apparatus 12 sends ICMP echo packets in a successive manner by the predetermined number of times. Nevertheless, if no ICMP reply packets return, the packet relay apparatus 12 retrieves the class name "business" using the path 20-1 by the "10. 1. 2. 1" gateway from the address translation rule table 36 of FIG. 7 and rewrites the status of the thus retrieved class name "business" of the class table 34 of FIG. 4 to "bad". If the status of the class table 34 is "bad" upon the

class retrieval, the packet relay apparatus 12 ignores that class and performs no address translations. Thus, after the entry of the status "bad" into the class table 34, the packets belonging to the class name "business" are changed over to the communication using the path 10-2.

FIG. 17 is a flowchart of path communication validation processing effected by the packet relay apparatus 12 of the present invention. First, in step S1 an ICMP echo packet is sent toward a specific destination node on a communication path, and in step S2 reception of an ICMP reply packet from the destination is waited for. In step S3, a check is made to see whether the ICMP reply packet has been received or not, and if affirmative, then in step S4 an unreception counter is reset to zero, to complete the processing. If in step S3 the time-out occurs as a result of no reception of any ICMP reply packet within a predetermined period of time, then the procedure goes to steps S5 in which the unreception counter is incremented by one. Then in step S6 a check is made to see whether the sending count is the maximum value or not, and if negative, then the procedure returns to step S1 to again send an ICMP echo packet. If in step S6 the sending count upon no reception of the ICMP reply packet has reached the maximum value, then the procedure goes to step S7 in which the class name using that gateway is retrieved from the address

translation table 38. Then in step S8, the status of the class of the class table 34 is altered to "bad", to perform the path changeover for the subsequent steps. Such a packet relay apparatus 12 in accordance with the present invention is not limited to the FIG. 1 form but is applicable to any form of networks as long as it is the IP network. For example, application to an ATM network, a frame relay, etc., is also feasible since the packet relay apparatus 12 of the present invention is applicable as long as the path is logically plural, irrespective of the physical number thereof.

FIG. 18 is an explanatory diagram of the communication form in the cases where the packet relay apparatus 12 of the present invention is applied to the ATM network. In this form, the communication between the LANs 11-2 and 11-1 is implemented by way of an ATM network 62. The LAN 11-1 is provided with the node 10-1 and the router 14-1, and the LAN 11-2 is provided with the packet relay apparatus 12 of the present invention. In such an ATM network 62, a plurality of paths 64-1 and 64-2 are disposed for the same destination so that ABR, VBR, CBR, UBR or other service level and assurance band parameters are provided for each of the paths 64-1 and 64-2, to achieve a utilization of a securer quality of service QOS. Herein, with a virtual path ID (PVI) = 0 and a virtual circuit ID (VCI) = 100, the path 64-1 is set with CBR (Constant Bit Rate) of 1 Mbps, and

simultaneously the path 64-2 is formed with VPI/VCI = 0/200 and CBR of 2 Mbps. In this case, for the application class name "business", the packet relay apparatus 12 of the present invention allocates a subnetwork address "10. 1. 2. 1" to the path 64-1 and allocates a subnetwork address "10. 1. 3. 1" to the path 64-2, whereby the LAN 11-2 looks to have two different subnets when viewed from the LAN 11-1, to thereby establish a communication with the paths 64-1 and 64-2 that are controlled on a class-by-class basis.

In the case of the frame relay for packet interchange as well, similar to the case of FIG. 18, the LAN 11-2 on one hand is provided with the packet relay apparatus 12 of the present invention so that the paths can separately be used for each class of the application, thereby assuring the service level such as CIR. In the communication form of FIG. 18, the packet relay apparatus 12 provided in the LAN 11-2 allocates different subnet addresses on an application class-by-class basis, although the LAN 11-2 need not necessarily be subjected to allocation of the subnet addresses differing depending on the class. Instead, class-by-class differing IP addresses may be allocated to obtain a terminal type connection whereby class based communication path control can be implemented similar to the case of the provision of the packet relay apparatus 12 of the present invention. More specifically, when

viewed from the LAN 11-1, the business application from the LAN 11-2 looks like a packet from the IP address "10. 1. 1. 1" and the other applications look like packets from the IP address "10. 1. 1. 2", so that as a result of viewing the packet IP address, the router 14-1 has merely to relay the packet to the paths 64-1 and 64-2 having different VCIs so that the packet passes through the paths 64-1 or 64-2 depending on the applications, to thereby make it possible to implement the control of the path on an application class basis.

As discussed hereinabove, according to the present invention, the application is classified to provide a class based communication path control, whereby a plurality of paths for the same destination can separately be used depending on the applications or communication node addresses. For example, a dedicated path may be allocated to relatively important communication such as business applications to thereby realize the band assurance and response assurance, thereby implementing an appropriate grading of the communication paths depending on the quality of service QOS that is a lower layer communication technique of the internet protocol.

It will be appreciated that the present invention is not limited to the above embodiments and that it embraces any appropriate variants without impairing the objects and advantages thereof. The present invention

is not restricted by the numerical values indicated in the above embodiments.

WHAT IS CLAIMED IS:

1. A packet relay apparatus for relaying packets between a node and an IP network, said apparatus

5 comprising:

a class processing unit arranged to classify send packets to be relayed to said IP network depending on the types of applications, said class processing unit making allocation of different virtual IP addresses on
10 a class by class basis;

a send packet relay unit arranged to translate source addresses of said send packets to be relayed to said IP network into virtual IP addresses on a class by class basis, said send packet relay unit establishing
15 IP communication paths on a class by class basis in said IP network; and

a reply packet relay unit arranged to inversely translate destination addresses of reply packets from said IP network passing through said IP communication
20 paths on a class by class basis into original addresses by reference to the results of address translation effected by said send packet relay unit.

2. The apparatus according to claim 1, further
25 comprising:

a class table having packet header information entered therein correspondingly to class names defining

the types of said applications;

an address translation rule table having virtual IP addresses and path information entered therein correspondingly to said classes; and

- 5 an address translation table having therein entered the results of address translation from said packet source addresses to said virtual IP addresses; and wherein

- 10 said send packet relay unit upon receipt of a send packet to said IP network refers to said address translation table to retrieve a source virtual IP address, said send packet relay unit if there is no entry in said address translation table determining a class by reference to said class table and thereafter referring
- 15 to said address translation rule table to retrieve a virtual IP address corresponding to said class, said send packet relay unit translating a send packet source address into said retrieved virtual IP address to enter the result of said address translation into said address
- 20 translation table, and wherein

- said reply packet relay unit upon receipt of a reply packet from said IP network refers to said address translation table to retrieve a destination address corresponding to a destination virtual IP address, said
- 25 reply packet relay unit inversely translating said destination virtual IP address of said packet into said retrieved destination address.

3. The apparatus according to claim 2, wherein
said class table has protocol types, send packet
source addresses and port Nos. and reply packet source
5 addresses and port Nos. entered correspondingly to said
class names, and wherein

said class retrieval unit retrieves a class from
a combination of a protocol type of a send packet to be
relayed to said IP network and a port No.

10

4. The apparatus according to claim 3, wherein
said class table has class names of a business
application entered in the form of combinations of send
packet TCP protocols and port Nos., said class table
15 having all of the combinations of the other protocol
types of said send packets and source port Nos. entered
by class names of a default application.

5. The apparatus according to claim 2, wherein
20 said address translation rule table has virtual
IP addresses and gateway MAC addresses entered
correspondingly to class names entered in said class
table, and wherein

said send packet relay unit retrieves a virtual
25 IP address and a gateway MAC address corresponding to
a class name retrieved from said address translation rule
table.

6. The apparatus according to claim 2, wherein
said address translation table has pre-
translation source addresses and port Nos. and post-
5 translation virtual IP addresses and port Nos. entered
correspondingly to protocol types, and wherein

said send packet relay unit translates a send
packet source address into a virtual IP address retrieved
from said address translation rule table or said address
10 translation table, said send packet relay unit
translating a destination MAC address into a gateway MAC
address retrieved from said address translation rule
table, and wherein

said reply packet relay unit inversely
15 translates a destination virtual IP address received
from said IP network into a pre-translation source
address retrieved from said address translation table.

7. The apparatus according to claim 2, further
20 comprising:

a communication path validation unit arranged
to make a periodical validation of communication through
a communication path of said IP network by use of said
virtual IP address.

25

8. The apparatus according to claim 7, wherein
said communication path validation unit when

detecting an abnormal of said communication path prohibits a retrieval of a class that uses said communication path, to make a changeover to use of a default communication path.

5

9. The apparatus according to claim 8, wherein said class table includes a status indicative of usable or unusable, and wherein

10 detecting an abnormal of said communication path sets unusable in said status of said class table to prohibit a class retrieval.

10. A method of relaying packets between an inside node and an outside IP network, said method comprising the steps of:

15 classifying send packets to be relayed to said IP network, depending on the types of applications, to allocate a different virtual IP address to each class;

20 translating source addresses of said send packets to be relayed to said IP network into virtual IP addresses on a class by class basis to establish IP communication paths on a class by class basis in said IP network; and

25 inversely translating destination addresses of reply packets from said IP network passing through said IP communication path on a class by class basis into

original addresses by reference to the results of address translation in said send packet relaying step.

ABSTRACT OF THE DISCLOSURE

A packet relay apparatus is disposed that relays packets between an inside node and an outside IP network.

- 5 A class processing unit classifies send packets to be relayed to the IP network and allocates different virtual IP addresses thereto. A send packet relay unit translates source addresses of the send packets to be relayed to the IP network into virtual IP addresses on
- 10 a class by class basis, to establish classified IP communication paths. For reply packets from the IP network passing through communication paths on a class by class basis, a reply packet relay unit inversely translates destination virtual IP addresses into
- 15 original addresses by reference to the results of address translation effected by the send packet relay unit.

FIG. 1 PRIOR ART

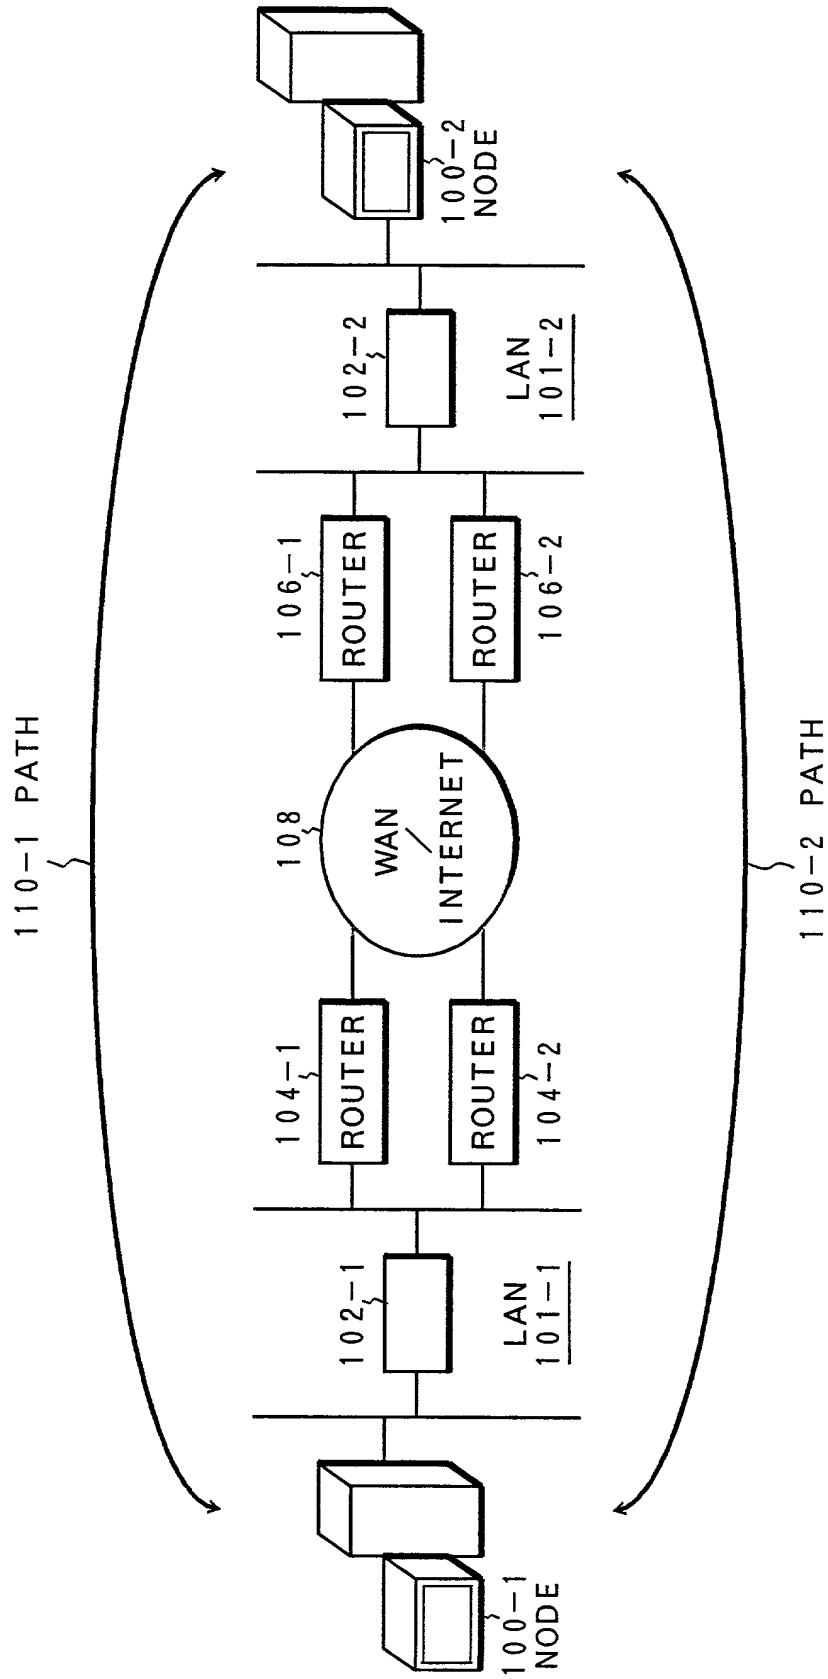


FIG. 2 PRIOR ART


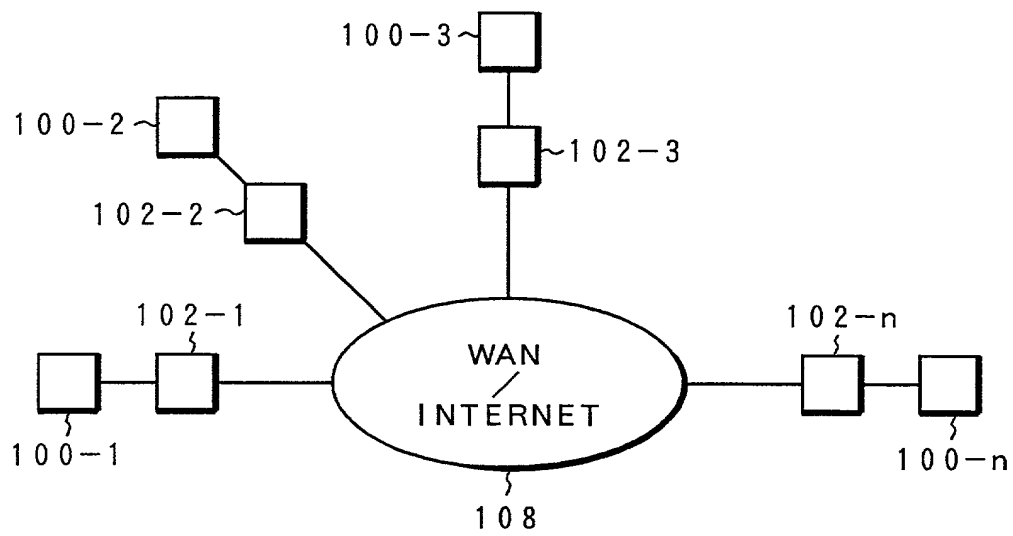


FIG. 3

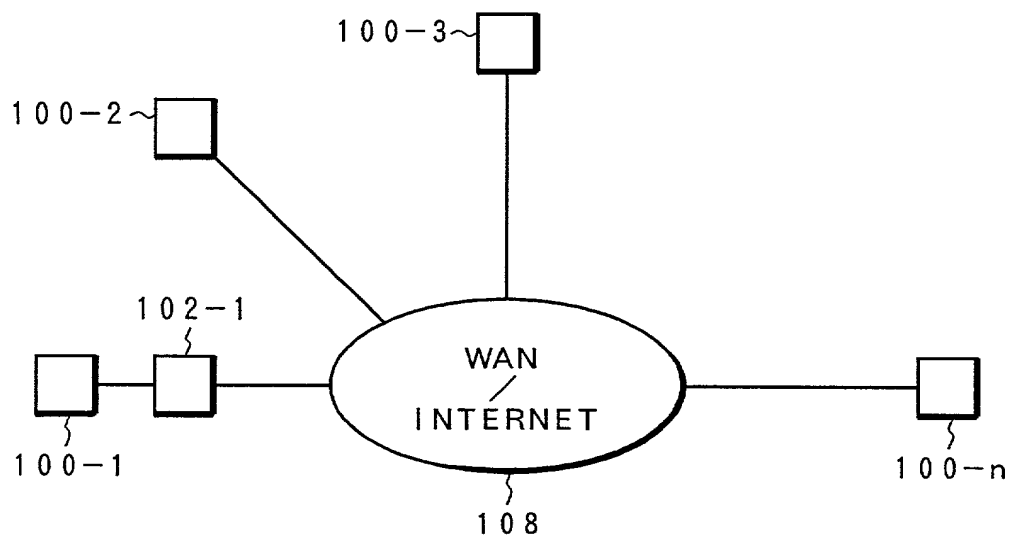

Year	1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1960	1961	1962	1963	1964	1965	1966	1967	1968	1969	1970	1971	1972	1973	1974	1975	1976	1977	1978	1979	1980	1981	1982	1983	1984	1985	1986	1987	1988	1989	1990	1991	1992	1993	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	

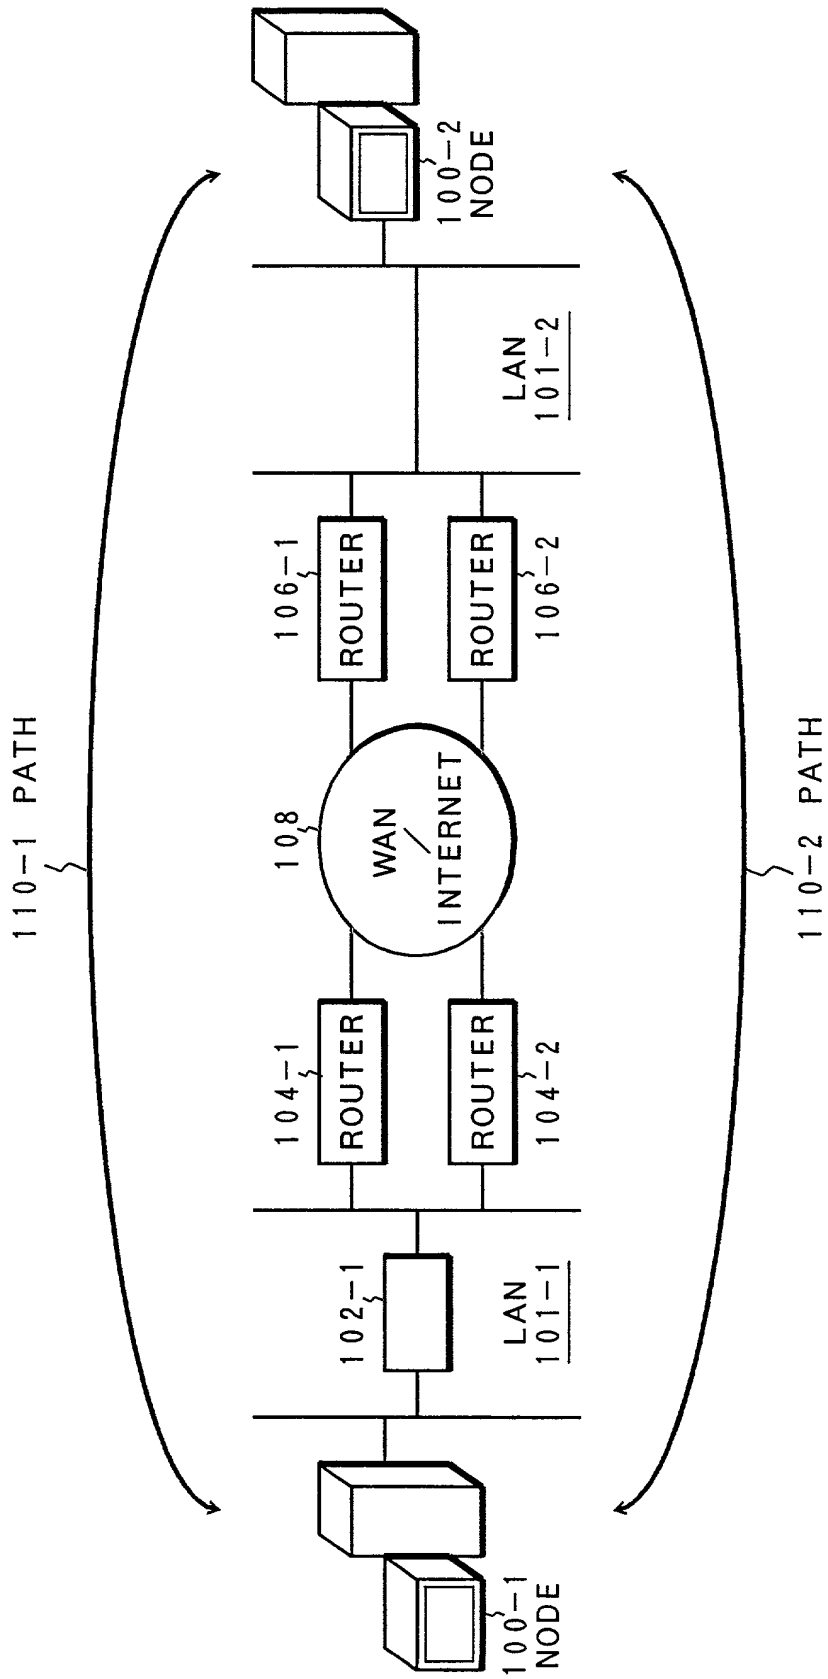


FIG. 5

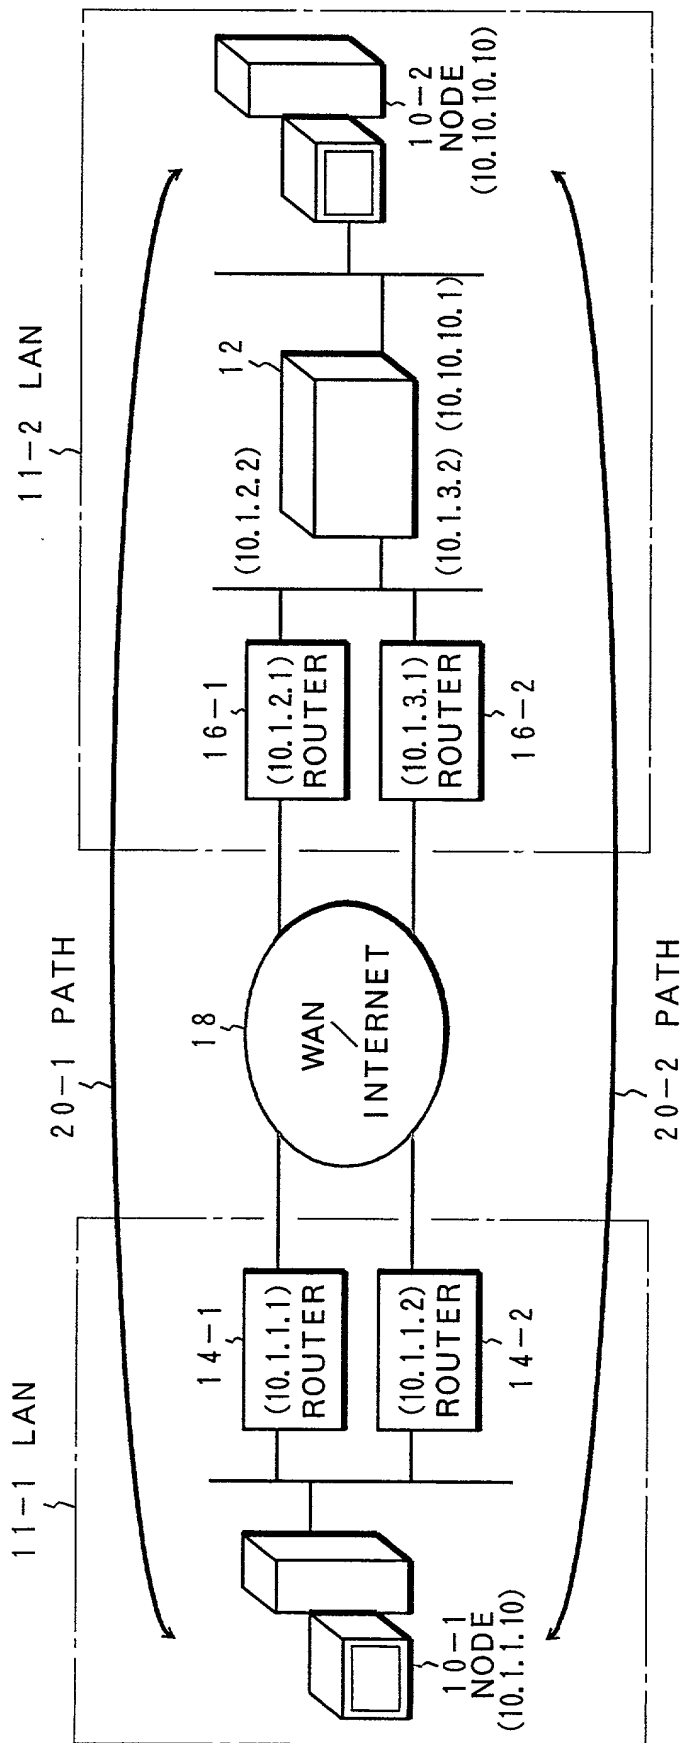


FIG. 6

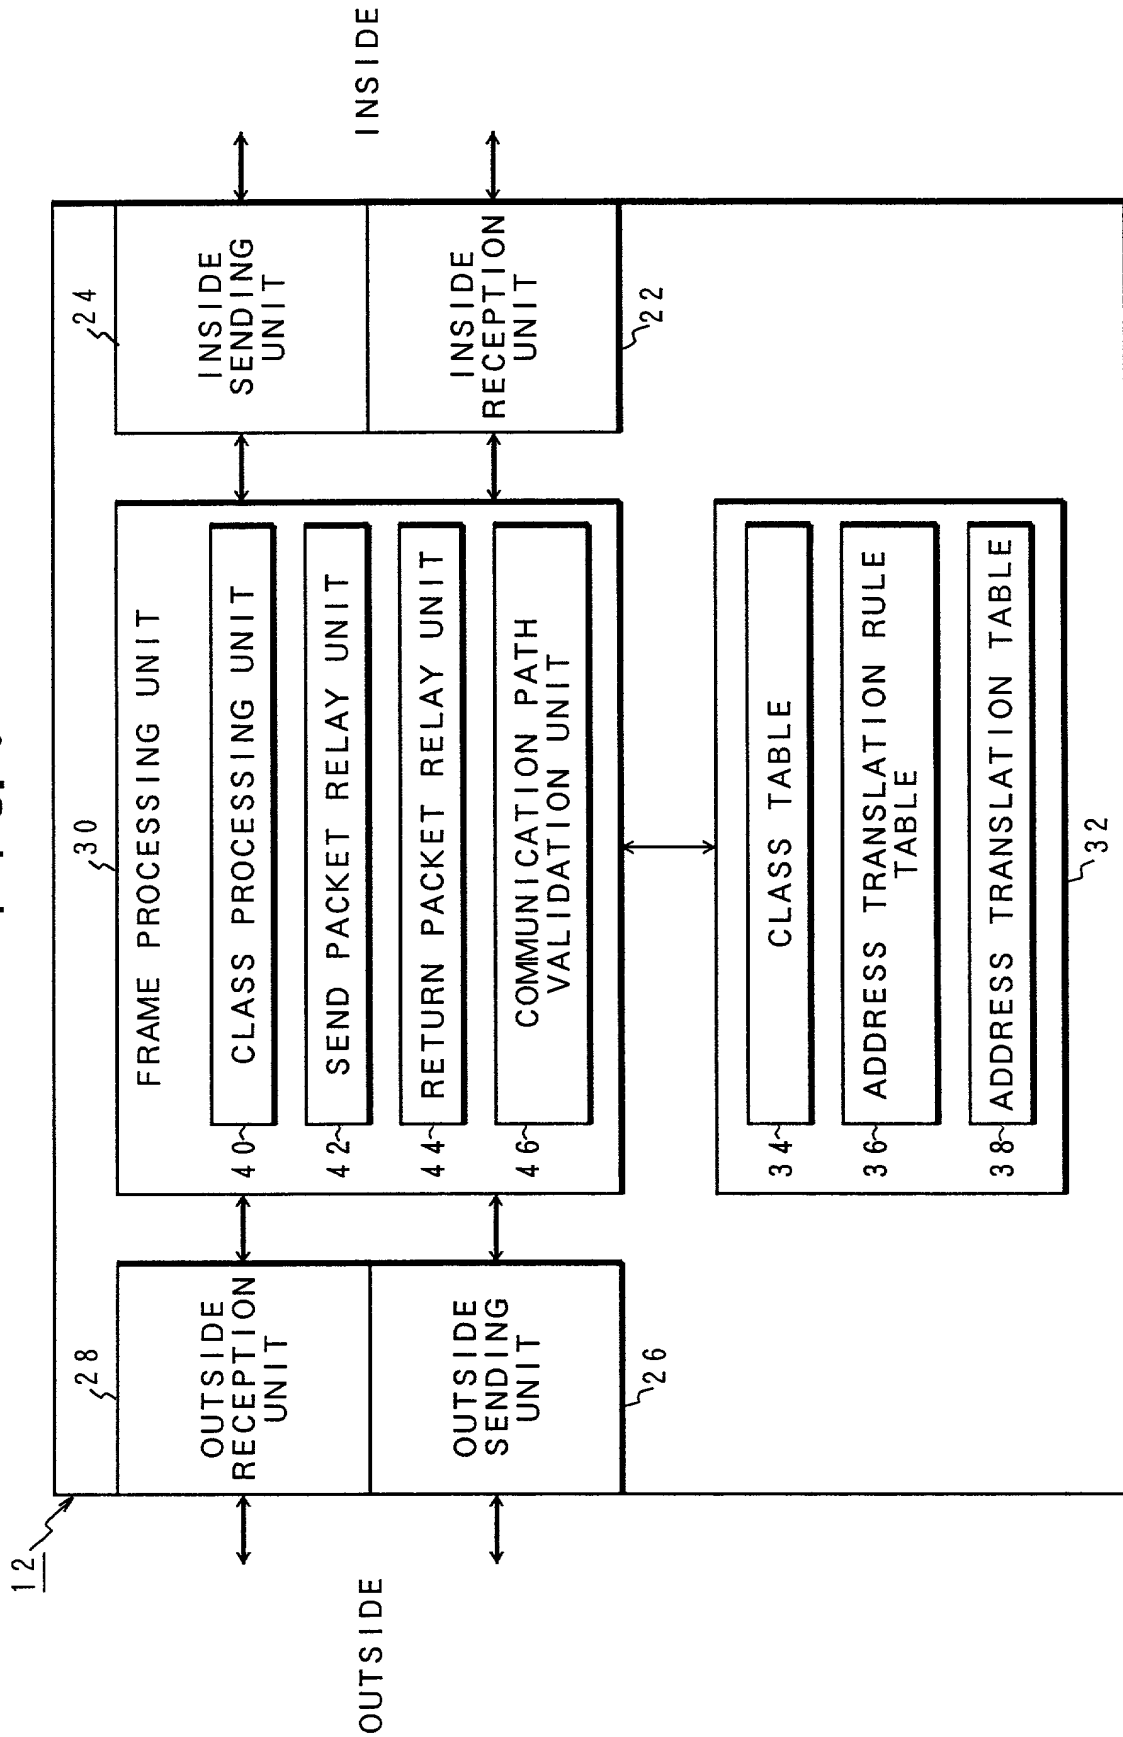


FIG. 7

34 CLASS TABLE

CLASS NAME	PROTOCOL TYPE	INSIDE		OUTSIDE		STATUS
		ADDRESS	PORT	ADDRESS	PORT	
BUSINESS	TCP	ALL	472	ALL	ALL	FAIR
DEFAULT	ALL	ALL	ALL	ALL	ALL	FAIR

FIG. 8

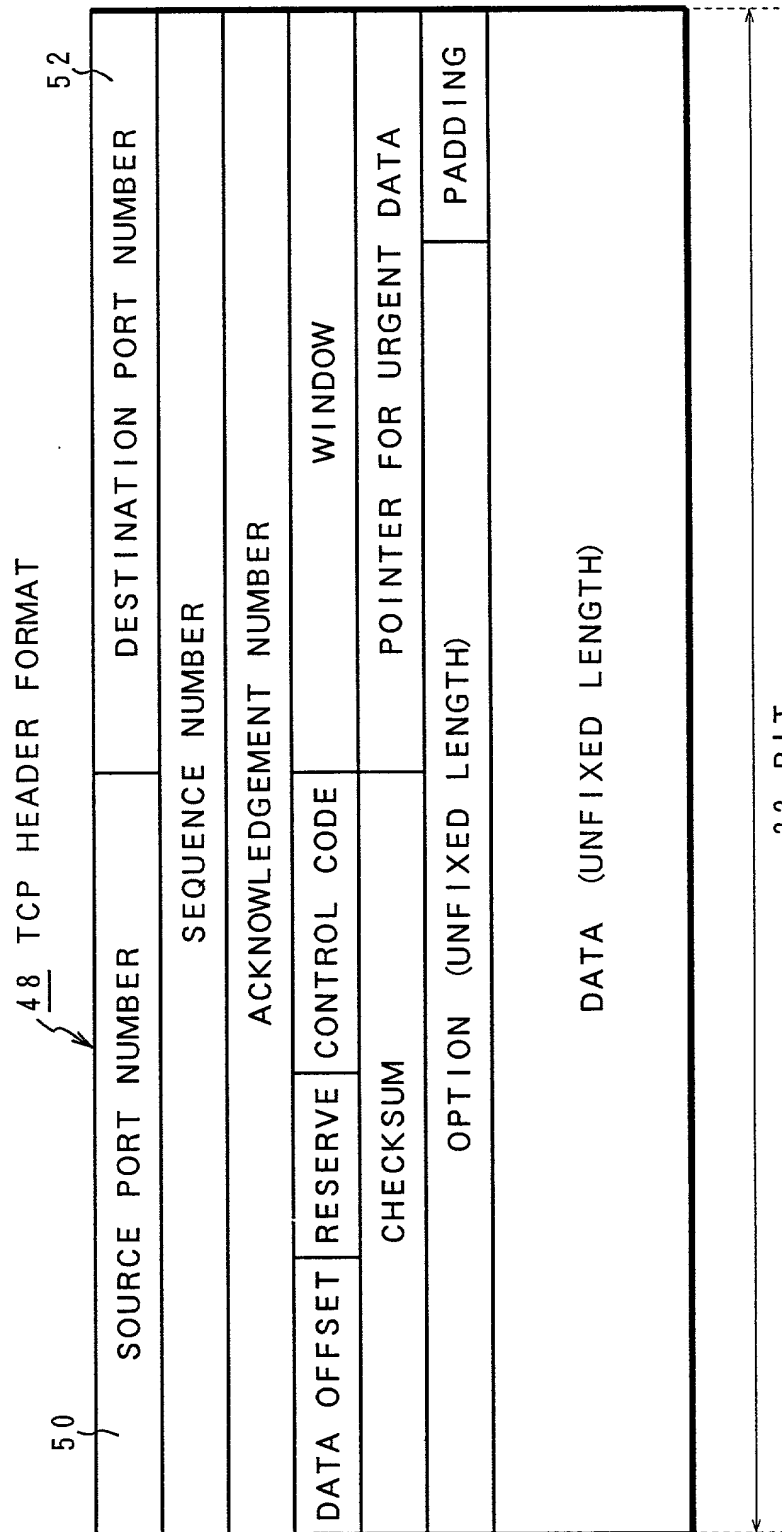


FIG. 9

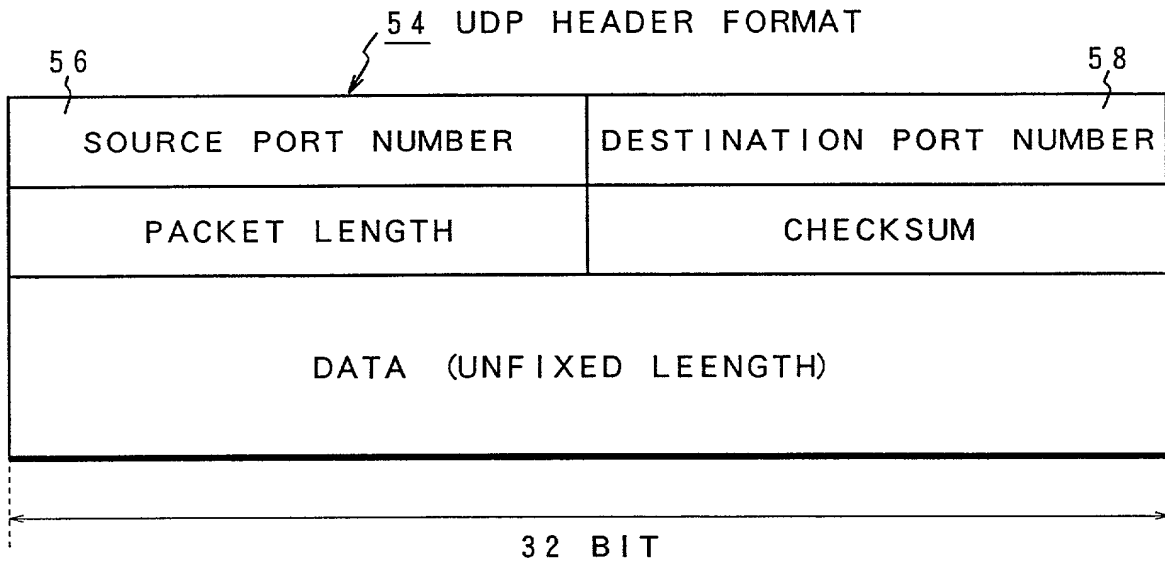


FIG. 10

36 ADDRESS TRANSLATION
RULE TABLE

CLASS NAME	ADDRESS TRANSLATION	GATEWAY
BUSINESS	10. 1. 2. 0	10. 1. 2. 1
DEFAULT	10. 1. 3. 0	10. 1. 3. 1

FIG. 11

38 ADDRESS TRANSLATION TABLE

PROTOCOL TYPE	PRE-TRANSLATION		POST-TRANSLATION	
	ADDRESS	PORT	ADDRESS	PORT
TCP	10. 10. 10. 10	5000	10. 1. 2. 10	2000
UDP	10. 10. 10. 11	6000	10. 1. 3. 11	2001
....

FIG. 12

ADDRESS CONFIGURATION

INTERFACE	ADDRESS	NETWORK MASK
NODE 10-1	10. 1. 1. 10	255. 255. 255. 0
ROUTER 14-1 (LAN SIDE)	10. 1. 1. 1	255. 255. 255. 0
ROUTER 14-2 (LAN SIDE)	10. 1. 1. 2	255. 255. 255. 0
ROUTER 16-1 (LAN SIDE)	10. 1. 2. 1	255. 255. 255. 0
ROUTER 16-2 (LAN SIDE)	10. 1. 3. 1	255. 255. 255. 0
APPARATUS 12 (OUTSIDE)	10. 1. 2. 2	255. 255. 255. 0
APPARATUS 12 (OUTSIDE)	10. 1. 3. 2	255. 255. 255. 0
APPARATUS 12 (INSIDE)	10. 10. 10. 1	255. 255. 255. 0
NODE 10-2	10. 10. 10. 10	255. 255. 255. 0

○ ROUTER SIDE INTERFACE OF APPARATUS 12 IS NAMED OUTSIDE
AND NODE 10-2 SIDE INTERFACE THEREOF IS NAMED INSIDE.

FIG. 13A

ROUTER 14-1 ROUTING TABLE

DESTINATION SUBNETWORK	MASK	GATEWAY
10. 1. 1. 0	255. 255. 255. 0	DIRECT (DIRECT CONNECTION)
10. 1. 2. 0	255. 255. 255. 0	ROUTER 16-1

FIG. 13B

ROUTER 14-2 ROUTING TABLE

DESTINATION SUBNETWORK	MASK	GATEWAY
10. 1. 1. 0	255. 255. 255. 0	DIRECT (DIRECT CONNECTION)
10. 1. 3. 0	255. 255. 255. 0	ROUTER 16-2

FIG. 13C

ROUTER 16-1 ROUTING TABLE

DESTINATION SUBNETWORK	MASK	GATEWAY
10. 1. 2. 0	255. 255. 255. 0	DIRECT (DIRECT CONNECTION)
10. 1. 1. 0	255. 255. 255. 0	ROUTER 14-1

FIG. 13D

ROUTER 16-2 ROUTING TABLE

DESTINATION SUBNETWORK	MASK	GATEWAY
10. 1. 3. 0	255. 255. 255. 0	DIRECT (DIRECT CONNECTION)
10. 1. 1. 0	255. 255. 255. 0	ROUTER 14-2

FIG. 13E

NODE 10-1 ROUTING TABLE

DESTINATION SUBNETWORK	MASK	GATEWAY
10. 1. 1. 0	255. 255. 255. 0	DIRECT (DIRECT CONNECTION)
10. 1. 2. 0	255. 255. 255. 0	10. 1. 1. 1 (ROUTER 14-1)
10. 1. 3. 0	255. 255. 255. 0	10. 1. 1. 2 (ROUTER 14-2)

FIG. 13F

NODE 10-2 ROUTING TABLE

DESTINATION SUBNETWORK	MASK	GATEWAY
10. 10. 10. 0	255. 255. 255. 0	DIRECT (DIRECT CONNECTION)
0. 0. 0. 0 (DEFAULT)	0. 0. 0. 0	10. 10. 10. 1 (APPARATUS 12)

FIG. 14

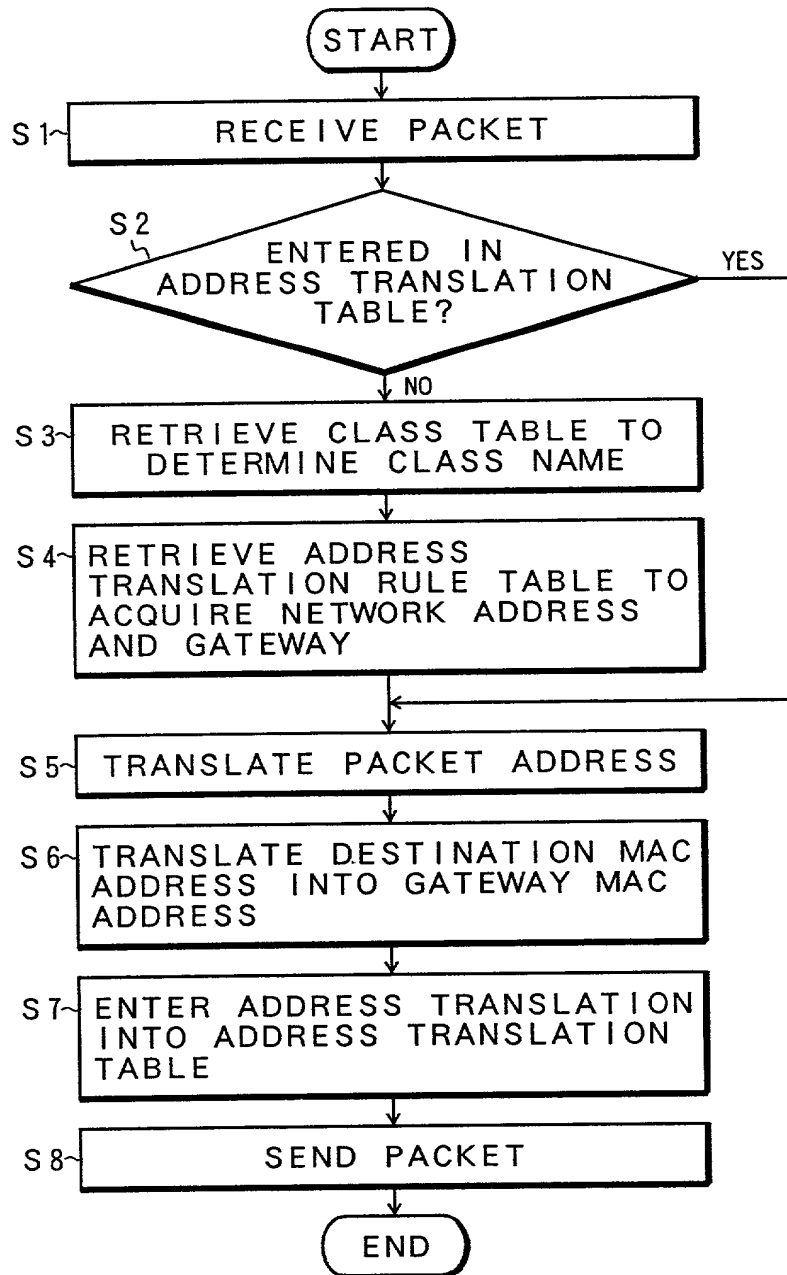


FIG. 15

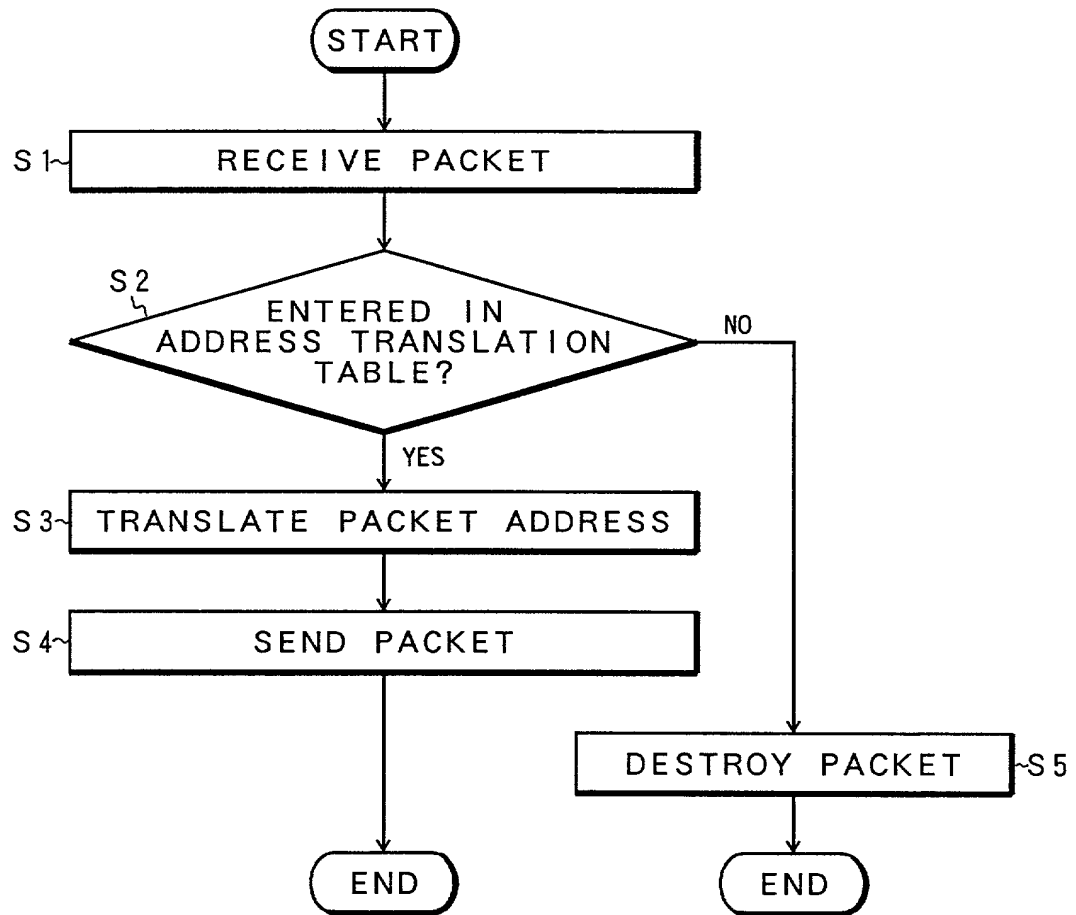


FIG. 16

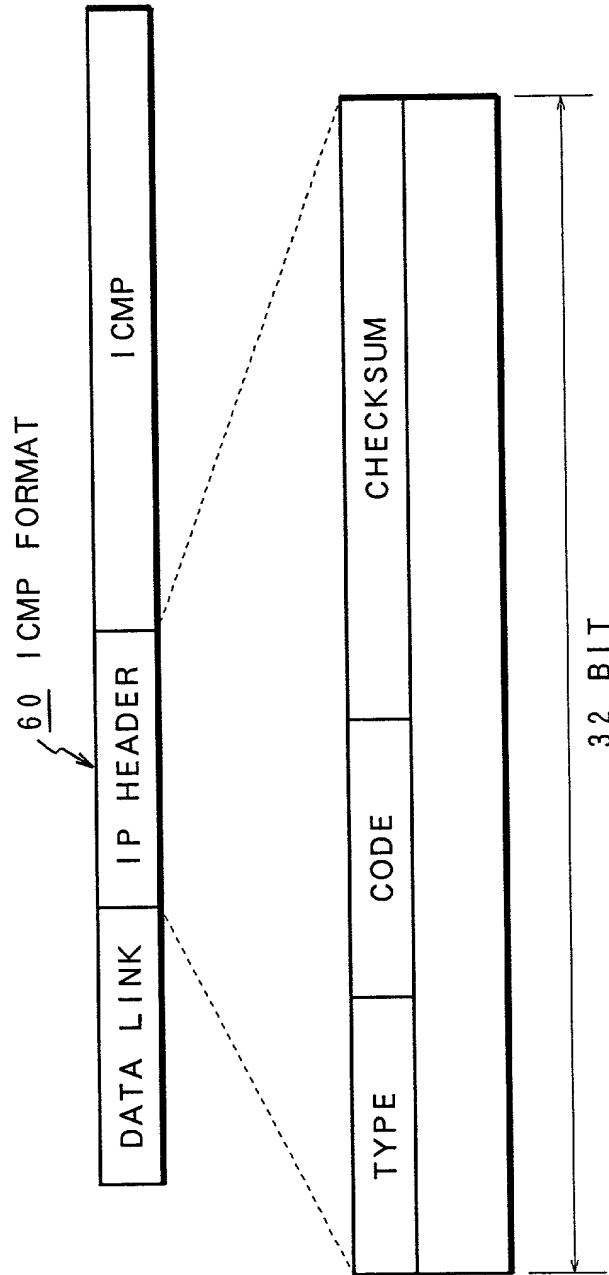


FIG. 17


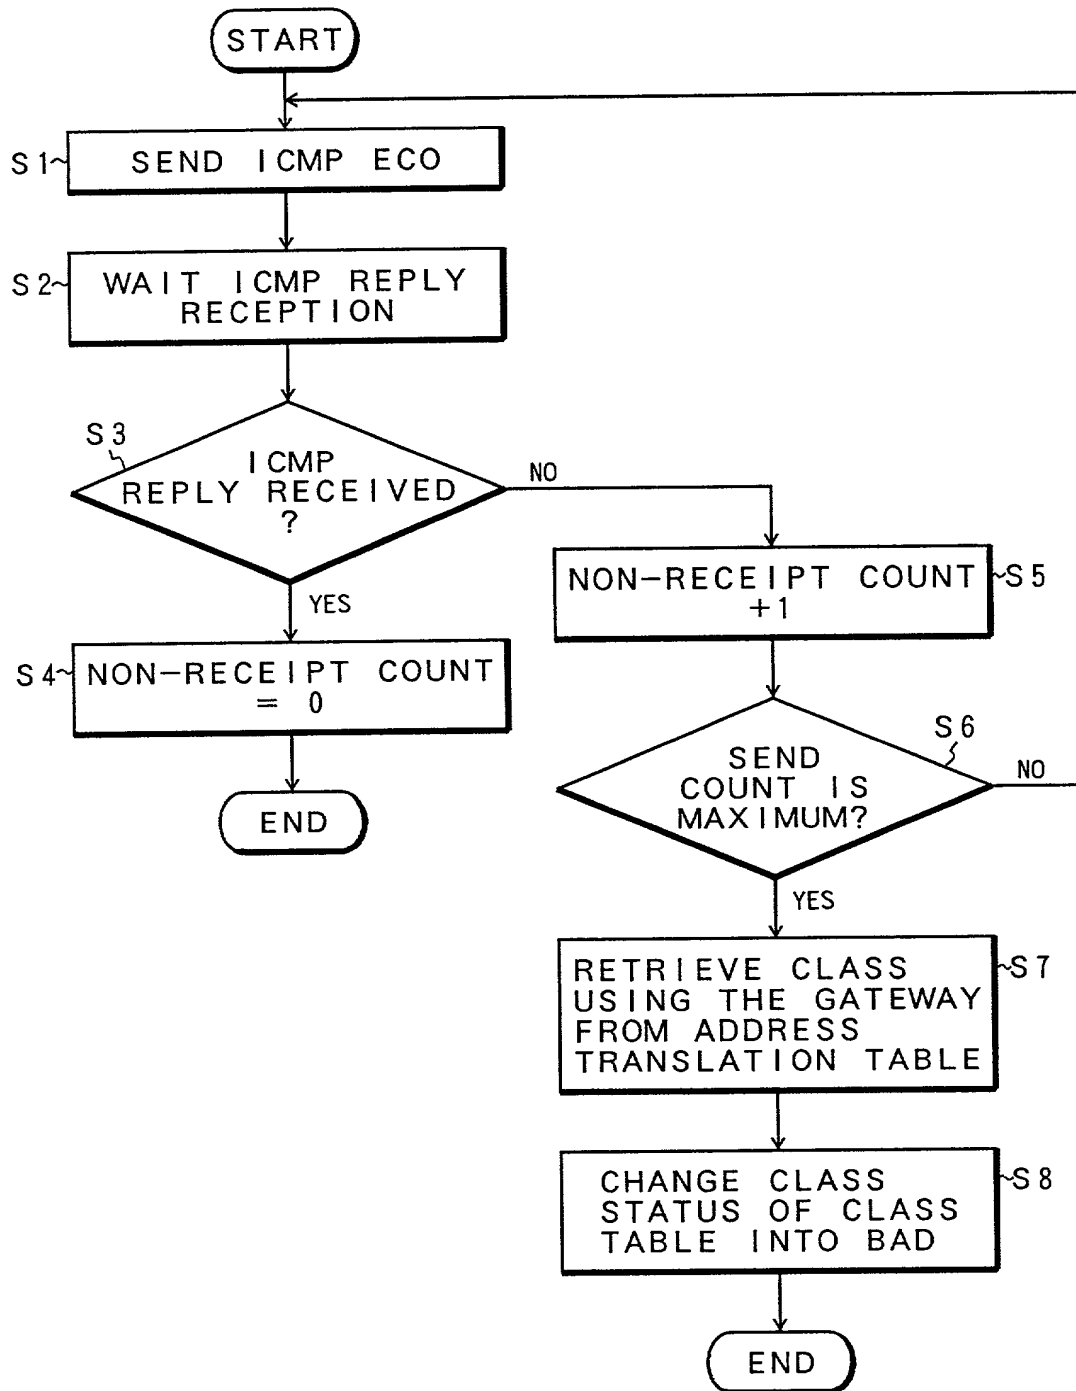


FIG. 18

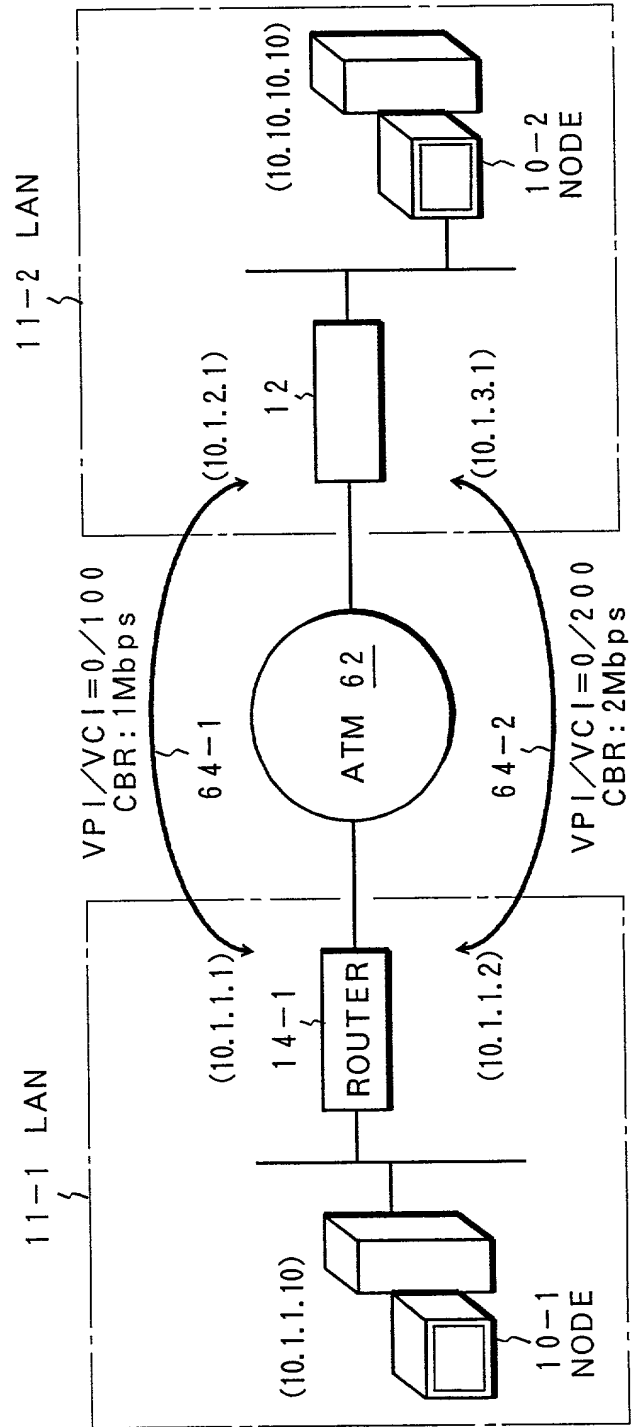

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

Packet relay apparatus and method

上記発明の明細書（下記の欄でx印がついていない場合は、本番に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約国際出願番号を _____ とし、
（該当する場合） _____ に訂正されました。

☐ was filed on _____
as United States Application Number or
PCT International Application Number
_____ and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Page 1 of 1

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国外の国の少なくとも一ヶ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-344,107

(Number)

(番号)

Japan

(Country)

(国名)

(Number)

(番号)

(Country)

(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国外を指定している特許協力条約365条(c)項に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような虚偽による虚偽の表明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

3/12/99

(Day/Month/Year Filed)

(出願年月日)

(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

James D. Halsey, Jr., 22,729; Harry John Staas, 22,010; David M. Pitcher, 25,908; John C. Garvey, 28,607; J. Randall Beckers, 30,358; William F. Herbert, 31,024; Richard A. Gollhofer, 31,106; Mark J. Henry, 36,162; Gene M. Garner II, 34,172; Michael D. Stein, 37,240; Paul I. Kravetz, 35,230; Gerald P. Joyce, III, 37,648; Todd E. Marlette, 35,269; Harlan B. Williams, Jr., 34,756; George N. Stevens, 36,938; Michael C. Soldner, P-41,455 and William M. Schertler, 35,348 (agent)

書類送付先

Send Correspondence to:

STAAS & HALSEY
700 Eleventh Street, N.W.
Suite 500
Washington, D.C. 20001

直接電話連絡先 (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

STAAS & HALSEY
(202) 434-1500

唯一または第一発明者名	Full name of sole or first inventor Hideshi Sakurai		
発明者の署名	日付	Inventor's signature Hideshi Sakurai	Date 7/11/00
住所	Residence Kawasaki, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan		
第二共同発明者	Full name of second joint inventor, if any Koji Torii		
第二共同発明者	日付	Second inventor's signature Koji Torii	Date 7/11/00
住所	Residence Kawasaki, Japan		
国籍	Citizenship Japan		
私書箱	Post Office Address c/o FUJITSU LIMITED 1-1, Kamikodanaka 4-chome, Nakahara-ku, Kawasaki-shi, Kanagawa 211-8588, Japan		

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)